

MCS Series

Desiccant Dehumidifier



Product Description

The MCS300 desiccant dehumidifier is designed to efficiently dehumidify air in open system applications. The compact construction allows extended periods of operation with a minimum of maintenance. The design facilitates easy transport by one person to and within the spaces to be dehumidified. As standard an advanced control panel for easy and user friendly control of different functions is fitted. An energy consumption monitor that can be reset makes it possible to measure the consumption (kWh) during a specific period. Its rugged formed metal frame and access panels are produced from stainless steel. The electrical control system conforms to EN 60204 (IEC204) standards and the electrical components are assembled behind the control panel. MCS300 dehumidifiers conform to both harmonised European Standards and to CE marking specifications.

Munters Rotor Technology


The desiccant rotor is manufactured from a corrugated composite material that is highly effective at attracting and holding water vapour. Every Munters dehumidifier applies a unique rotor technology. Airflows, air conditions, rotor sections, and rotor rotation speeds are optimised for specific applications. An innovative control system maximises the unit's energy efficiency. A characteristic of the MCS300 rotor technology is an efficient air distribution chamber, which divides the sectors and balances the dehumidification and reactivation airflows.

PRODUCT INFORMATION

MCS300

Features


- Requires minimal floor area.
- Advanced user friendly control panel and display.
- Easy monitoring of energy consumption.
- Built in safety function - fault signals for temperature control and tripped thermostat.
- Simplified maintenance - no need to open unit.
- Humidistat plug with low voltage.

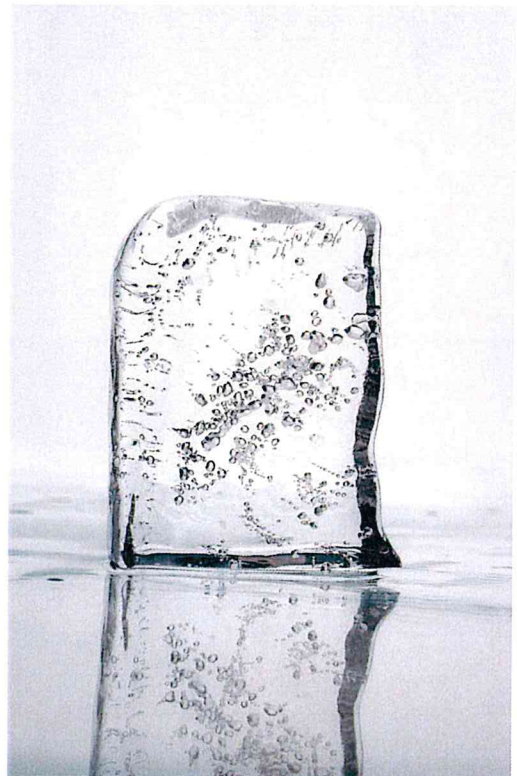

Model MCS300

Diagram measurements are for reference only.

Scaled and dimensioned AutoCAD drawings are available in Munters' DryCap program.

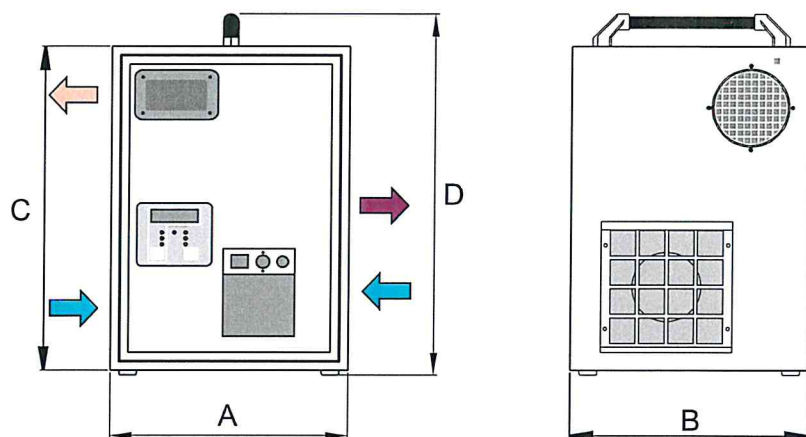

Width (A)	Depth (B)	Height (C/D)	Dry air	Wet air	Weight
400 mm	400 mm	550/605 mm	125 mm	80 mm	25 kg

Technical Specification

Process air

Rated airflow (m³/h)	300
Available static pressure (Pa)	200

Reactivation air

Rated airflow (m³/h)	60
Available static pressure (Pa)	200

Total power, voltage and current (amps/phase)

Total power(kW)	2,1
115V 1-50/60Hz (A)	14,5
230V 1-50Hz (A)	9,1


Miscellaneous data

Operating temperature (°C)	-20/+40
Max noise level unducted (dBA)	60
Air filter standard	G3
IEC protective class (unit)	IP44
IEC protective class (electrical panel)	IP54

Dehumidification capacity

Approximate capacity in kg/h at different inlet process air relative humidity, % RH.

Dehumidification capacity, kg/h

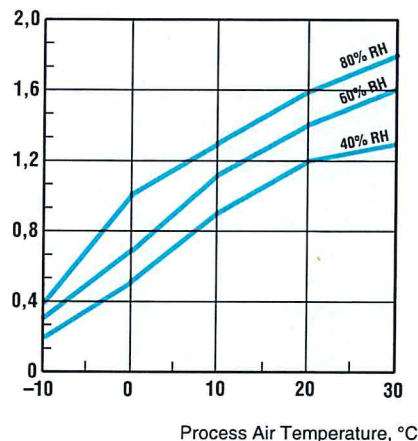

Options

- Electromechanical humidistat
- Air cooled condenser
- Silencer (air inlet)
- Humidistat connection Kit

AUSTRALIA

Tel +61 2 8843 1588

CHINA

Tel +86 10 804 18000

INDIA

Tel +91 20 668 18 900

NETHERLANDS

Tel +31 172 43 32 31

SWEDEN

Tel +46 8-626 6300

UNITED KINGDOM

Tel +44 1480 432 243

AUSTRIA

Tel +43 1 6164298-0

DENMARK

Tel +45 4495 3355

ITALY

Tel +39 0183 521377

POLAND

Tel +48 58 305 35 17

SWITZERLAND

Tel +41 52 3438886

UNITED STATES

Tel +1 978 241 1100

BELGIUM

Tel +32 2 240 68 68

FINLAND

Tel +358 20 776 8230

JAPAN

Tel +81 3 5970 0021

SINGAPORE

Tel +65 6744 6828

THAILAND

Tel +66 2 642 2670-3

VIETNAM

Tel +84 8 825 6838

BRAZIL

Tel +55 41 3317 5050

FRANCE

Tel +33 1 3411 5757

KOREA

Tel +82 2 761 8701

SOUTH AFRICA

Tel +27 11 997 2000

TURKEY

Tel +90 262 751 3750

CANADA

Tel +1 905 8585894

GERMANY

Tel +49 40-879690-0

MEXICO

Tel +1 52 722 270-4029

SPAIN

Tel +34 91 640 09 02

UNIT. ARAB EMIRATES

Tel +971 4 8809295



Munters