


PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Aug. 2019

Item number:	14309454
Product name:	Molaloc + Parket, Ash

Picture

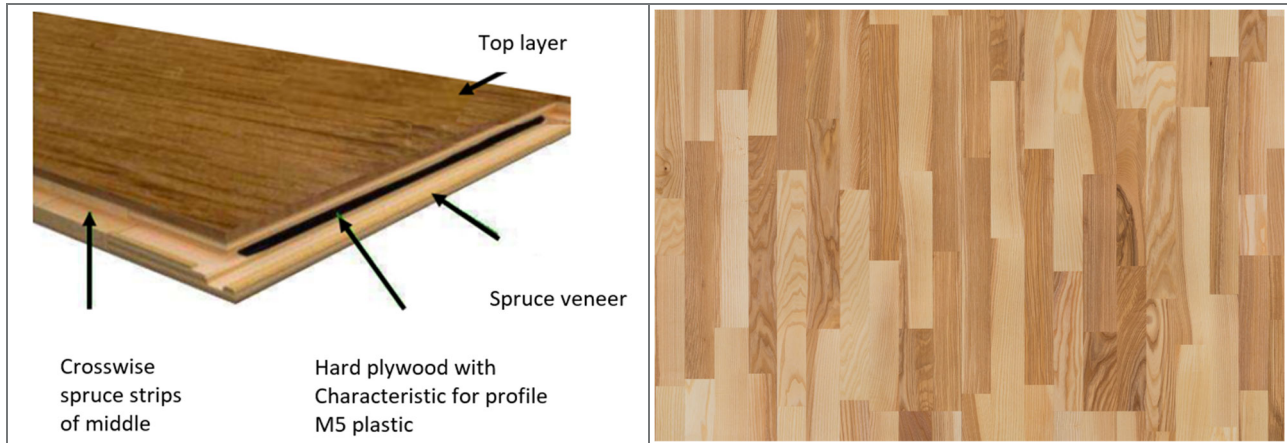

Picture no. 1

Picture no. 2

Product description

Appearance	Parquet with natural yellowish to slight brown color (or ash wood in white colour finishing), with brown and dark brown strips and clearly marked structure and characteristic for ash dark heartwood and knots.
Classification ac. To N13489	Free class, Classic
Pattern of surface	3-strips
Finishing	7 layers, 2 layers of UV filler + 5 layers of UV lacquer
Lacquer	UV lacquer, Cream Matt, Gloss 9-12
Oil	-
Hardness	Hard wood
Floor heating installation	Yes, max. 27°

Dimensions

Length	2190 mm	<input checked="" type="checkbox"/> Cleaning and maintenance instructions – www.moland.dk
Width	182 mm	<input type="checkbox"/> Can be used for eco-label construction.
Thickness	14 mm	<input type="checkbox"/> FDV-documentation – www.moland.dk
Top layer	3,5 mm	

Lamel sizes

- Up to 1,5% of the material in delivery can be shorter for 30mm.

PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Aug. 2019

Technical specification

Dimension	14 x 182 x 2190mm	Delamination	Not allowed
Top layer	3,5mm Ash (+-0,2mm)	Torn grain	Not allowed
Middle layer	8mm	Colour on bevel and surface	Homogeneous expression
Bottom layer	2,5mm	Pressure marks	Not allowed
Locking method end	M5	Product marking	CE
Locking method longside	M5	Boards per packet/ m ²	8 boards = 3,18 m ²
Fire class	Dfl- s1	Packet per pallet/ m ²	40 packets = 127,6 m ²
Formaldehyde content	E1		
Thermal conductivity	0,12 W/mk		

Production tolerance

Moisture content	7% + -2%
Height difference	≤ 0,2 mm, 0,3 mm to a limited extent
Width	± 0,2 mm
Length	± 0,1%
Squareness	± 0,2% over the width
Crosswise bending	± 0,2% over the width
Longitudinal bending	± 1% of the length
Spring across the element	≤ 0,1% over the length

Grading


Fresh knots	≤ 8mm	
Cracked filled knots	Filled with brown Filler ≤ 5mm	
Dead knots	≤ 5 mm diameter / filled with brown filler.	
Dark lines	Allowed - slight	
Cracks	Not allowed	
Bark pockets	Up to 10mm width 20mm length - acceptable (filled)	
Sapwood	Up to 50% lamella`s width	
Structure variation	Allowed - moderately	
Color variation	Acceptable	
Worm hole	Not allowed	
Blue stained	Not allowed	
Stain (discoloration)	Not allowed	
Rot	Not allowed	

PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Aug. 2019

Packing

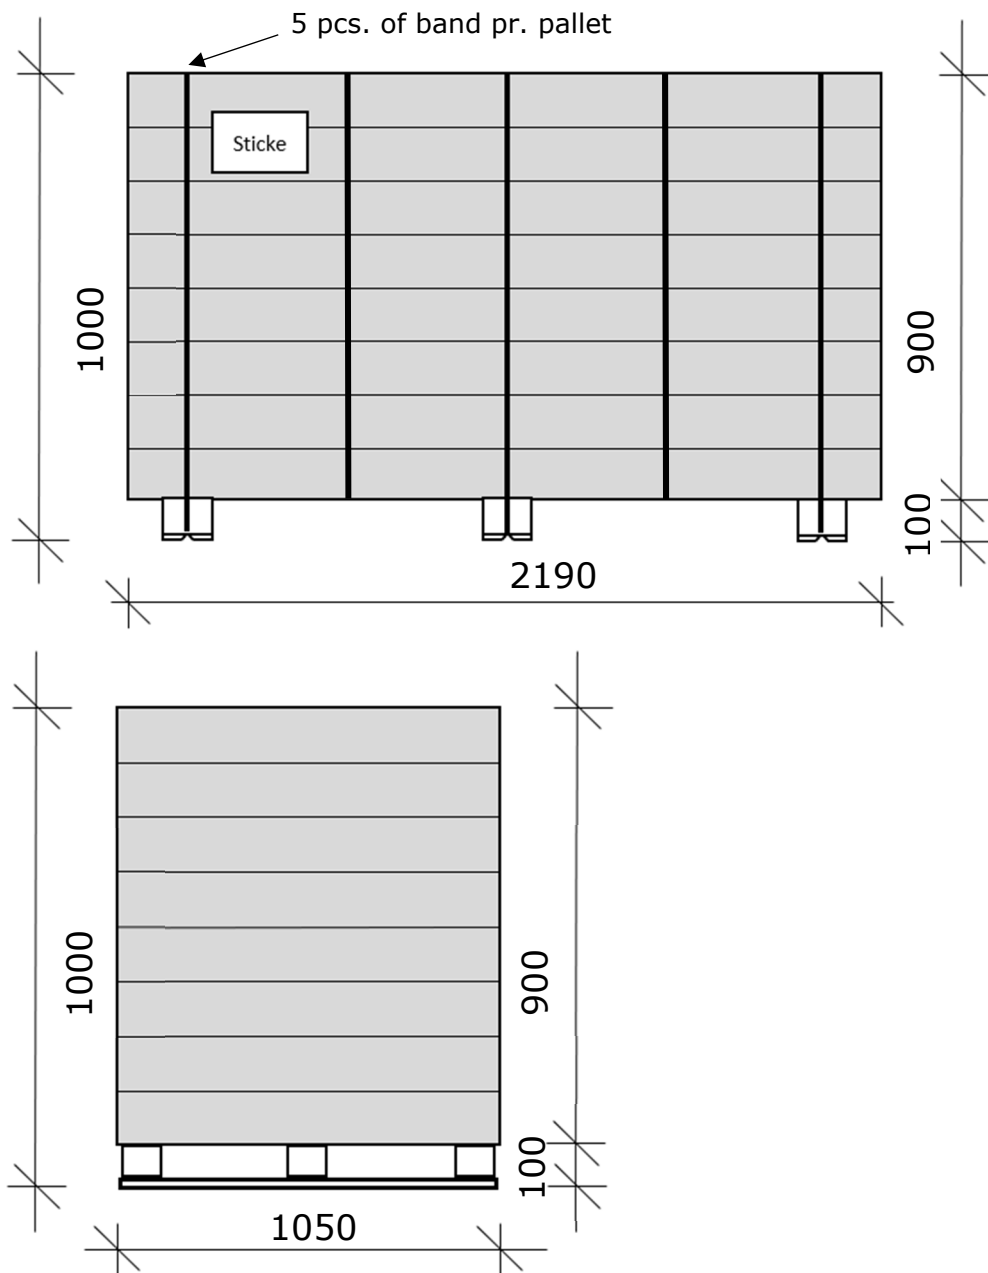

Pallets

Number of boards per pack	8 boards
M ² / pack	3,18 m ²
Packs / pallet	40 packs
Layer / pallet	8 layers
M ² / pallet	127,6 m ²